


圆弧齿

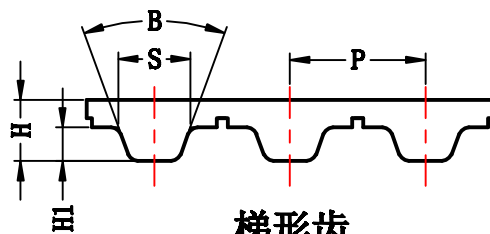

梯形齿

型号	节距 P	齿形 角 B°	齿根 厚 S	齿高 H1	带厚 H	10mm同步带最大 负载(N)		50mm同步带最大 负载(N)		100mm同步带 最大负载(N)		最小 许用 齿数
						开口 带	接驳 带	开口 带	接驳 带	开口 带	接驳 带	
MXL	2.032	40	1.14	0.51	1.14							10
XXL	3.175	50	1.73	0.76	1.52							10
XL	5.08	50	2.57	1.27	2.3	260	130	740	370	3170	1585	12
L	9.525	40	4.65	1.91	3.6	558	279	1570	785	3410	1705	14
H	12.7	40	6.12	2.29	4.3	936	468	2340	1170	5120	2560	14
XH	22.225	40	12.57	6.35	11.2	588	294	3560	1780	7180	3590	17
XXH	31.75	40	19.05	9.53	15.7							30
T2.5	2.5	40	1.5	0.7	1.3	240	120	1440	720	2800	1400	10
T5	5	40	2.65	1.2	2.2	350	175	1764	882	3340	1670	12
T10	10	40	5.3	2.5	4.5	870	435	4980	2490	10560	5280	14
T20	20	40	10.15	5	8	1285	642	7250	3625	15680	7840	17
AT3	3	50	2.4	1.1	1.9							12
AT5	5	50	3.75	1.2	2.7	520	260	3410	1705	6900	3450	14
AT10	10	50	7.3	2.5	4.5	1210	605	7760	3380	14750	7375	14
AT15	15	50	10.85	3.7	6.5	1579	789	9800	4900	18854	9427	16
AT20	20	50	14.7	5	8	1880	940	11456	5728	22958	11479	25
3M	3	14	1.78	1.22	2.4	300	150	1560	780	3650	1825	12
5M	5	14	3.05	2.06	3.8	860	430	4960	2480	10200	5100	14
8M	8	14	5.15	3.38	6	1350	675	7210	3605	14650	7325	17
14M	14	14	9.4	6.02	10	1900	950	11572	5786	23190	11595	25
20M	20	14	14	8.4	13.2							30
S2M	2		1.3	0.84	1.36							10
S3M	3		1.95	1.14	2.4	300	150	1560	780	3650	1825	12
S5M	5		3.15	1.9	3.4	860	430	4960	2480	10200	5100	14
S8M	8		5.2	3	5.6	1350	675	7210	3605	14650	7325	17
S14M	14		9.1	5.3	10	1900	950	11572	5786	23190	11595	25
RPP5M	5		3	1.95	3.4	860	430	4960	2480	10200	5100	14
RPP8M	8		5.5	3.3	5.6	1350	675	7210	3605	14650	7325	17
RPP14M	14		9.18	5.85	10	1900	950	11572	5786	23190	11595	25